


LAN Phone 302

Most User-friendly Ip Phone Solution

Multiple Advantages

- Built-in two 10/100Base-T Switch
The internal two-port Ethernet switch allows connection to 10/100Base-T Ethernet network via RJ-45 interface for both LAN Phone and a co-located PC.
- Big Key
Keypads are big on the phone-set LP-302. It is easy to use for elder people and children at home.
- Big LCD screen
The LCD of LP-302 shows big characters that is easy to read for elder people and children at home.
- Graphic Memory key
There are five memory keys in the left side of LP-302 that can be shown by different graphic pictures. It is very easy to understand and operate by elder people and children at home.
- Easy for installation
Users can set up the phone-set LP-302 by themselves through easy installation guide and steps from LCD panel.
- High cost-effective phone-set
- Easy Integrated with all kinds of IP-PBXs
- Provision Management via Welltech PRO-9500 Server

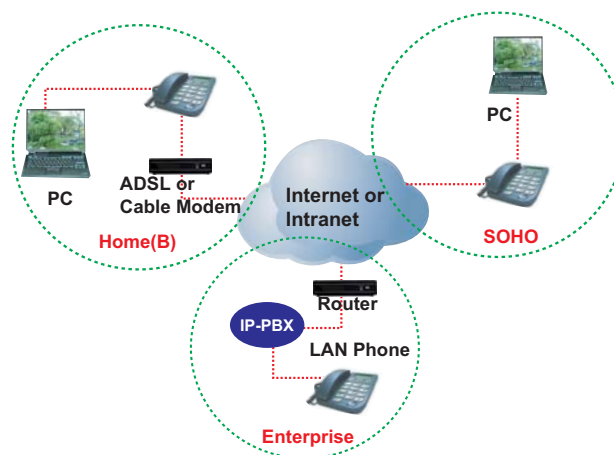

Specification

	H.323 Version	SIP version
WAN Interface	● One RJ-45 10/100 Base-T Port	● One RJ-45 10/100 Base-T Port
LAN Interface	● One RJ-45 10/100 Base-T Port	● One RJ-45 10/100 Base-T Port
Power Adapter	● 5V DC	● 5V DC
LCD Display	● 2 lines x 13 characters	● 2 lines x 13 characters
Memory Key	● 5	● 5
Function Key	● 4	● 4
Menu Control Key	● 4	● 4
Speaker Phone	● Support echo cancellation	● Support echo cancellation
Network Connect	● Static IP, DHCP, PPPoE	● Static IP, DHCP, PPPoE
Operation Mode	● Gatekeeper mode and Peer-to-Peer mode	● Proxy mode and Peer-to-Peer mode
Protocol	● H.323 V4	● SIP (RFC3261)
Audio Codec Support	● G.711U, G.711A, G.729	● G.711U, G.711A, G.729, G.729B
Telephony Features	● Mute, Forward, Hold, Redial, Transfer	● Mute, Forward, Hold, Redial, Transfer
Security Support	● H.235 Token Password	● MD5 Authentication
H.245 Support	● Support Fast Start and H.245 Tunneling	
Management	● LCD Menu, Web Browser, Telnet, Welltech Provision Server PRO-9500	● LCD Menu, Web Browser, Telnet, Welltech Provision Server PRO-9500
DTMF	● In-band, H245 Alphanumeric, H.245 Signaling, Q.931, RFC 2833	● In-band, RFC 2833, SIP INFO
Certification	● CE, FCC	● CE, FCC
Humidity	● (10 to 95%) non-condensing, operating, and non-operating/storage	● (10 to 95%) non-condensing, operating, and non-operating/storage
Operational Temperature	● (0 to 40°C)	● (0 to 40°C)
Storage Temperature	● (-10 to 60°C)	● (-10 to 60°C)
Dimension	● 200mm(W) x 79mm(H) x 210mm(D)	● 200mm(W) x 79mm(H) x 210mm(D)
Weight	● 830 g	● 830 g